


A-BUS zone control using RTI (RF) wireless remote

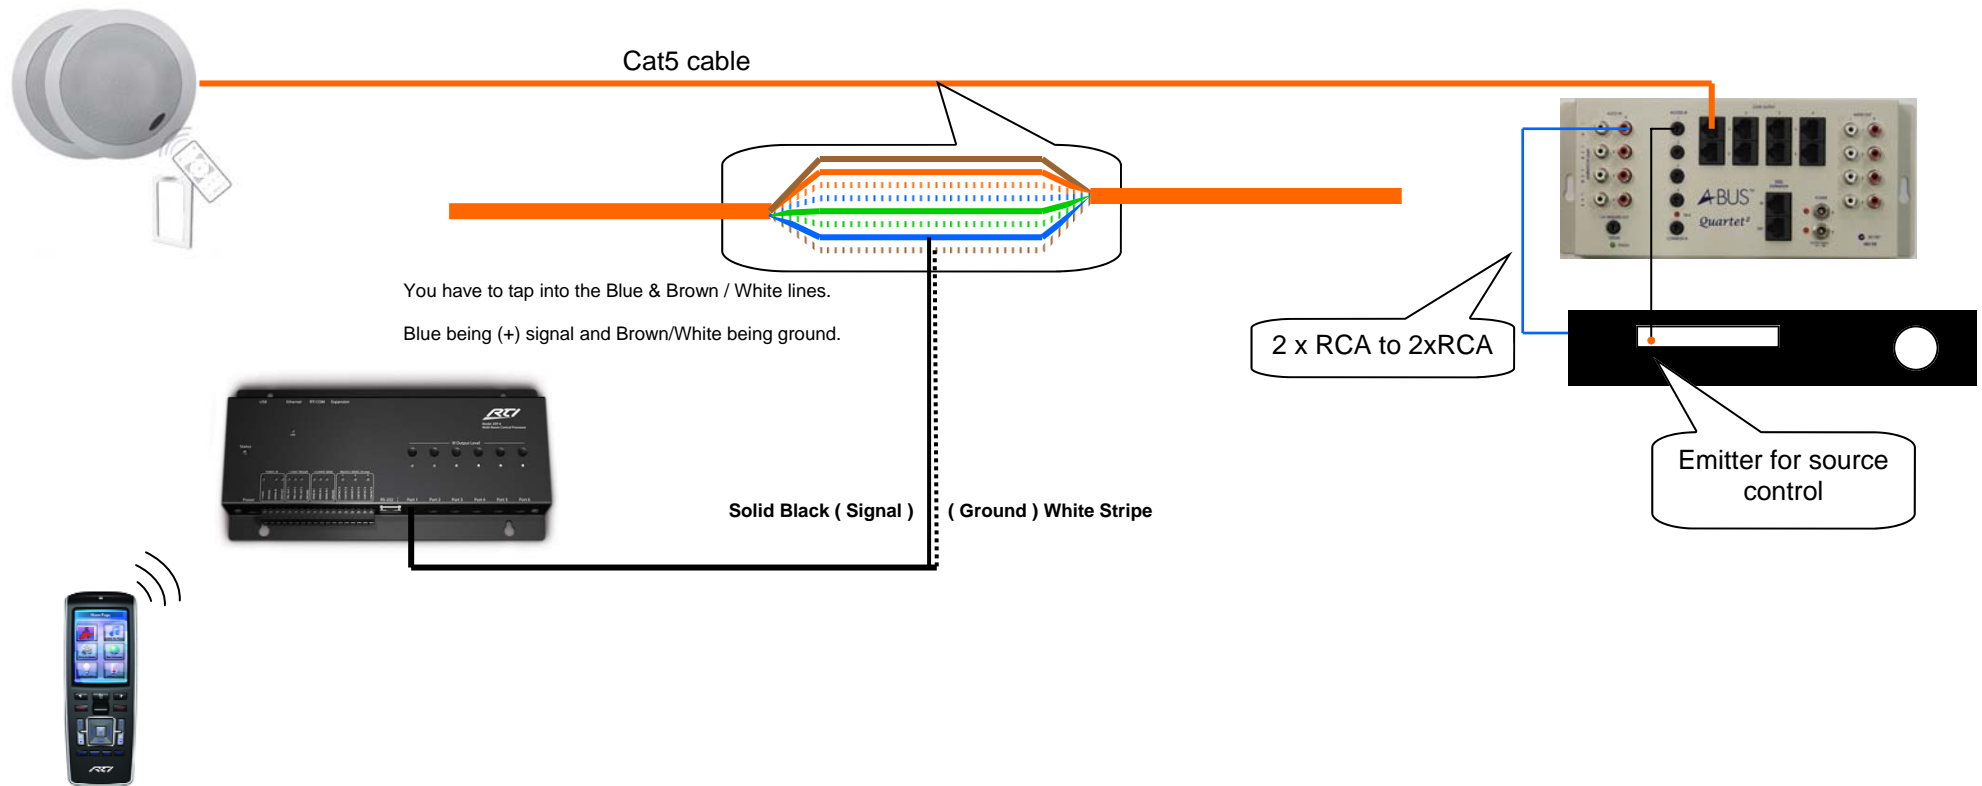

With the A-BUS discreet codes you will be able to control.

- Source Selection
- System Sleep Mode
- Source control only when an emitter is attached to the A-BUS hub

Due to A-BUS amplification each room volume can only be controlled via an A-BUS remote or one of the four volume control modules in each room.

RJ-45 connections

8	—————	24V +
6	—————	Right (+)
5	-----	Right (Ground)
3	-----	Status
2	—————	Left (+)
1	-----	Left (Ground)
4	—————	IR Signal
7	-----	Ground